

NASA TECH BRIEF

Ames Research Center




NASA Tech Briefs announce new technology derived from the U.S. space program. They are issued to encourage commercial application. Tech Briefs are available on a subscription basis from the National Technical Information Service, Springfield, Virginia 22151. Requests for individual copies or questions relating to the Tech Brief program may be directed to the Technology Utilization Office, NASA, Code KT, Washington, D.C. 20546.

Integrated Structure Vacuum Tube — A Concept

The problem:

To provide a miniature high-efficiency vacuum tube which can withstand high temperatures in intense radiation fields.

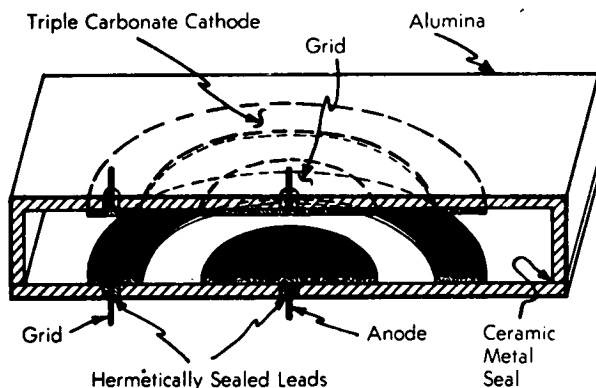

The solution:

A miniature vacuum tube which is operated at 600°C to provide cathode emission and is comprised of planar electrode structures on refractory substrates.

How it's done:

A single vacuum tube structure with circular electrode geometry is shown in the diagram. The electrodes are placed on the refractory substrate by conventional photolithographic techniques; connections to the electrode films are made by means of pins passing through the substrate. The grid electrodes are interconnected externally.

In use, cathode emission is made to occur by heating the entire structure to 600°C, and a positive potential is applied to the anode with a negative potential on the grids, as is customary with ordinary vacuum tubes. Electron flow takes place from the

ring cathode to the circular anode through the electric field produced by the grids. In the diagram, electron flow is from top to bottom.

A number of concentric thin- or thick-film grid structures can be interposed within the cathode ring on the upper planar assembly shown in the diagram and a similar number of grid structures can be disposed concentrically about the central anode area on the lower planar assembly to provide multigrid high-temperature devices corresponding to the tetrodes and pentodes of the present family of vacuum tubes.

The diagram illustrates the concept only in the form of planar, circular electrode structures, but it is evident that the electrodes can also be linear; linear structures can be used to provide increased current and power-handling capability. Recent use has been made of integrated vacuum tubes with two-dimensional structures; however, multidimensional structures of the type represented in the diagram should be more efficient and provide higher transconductances than are obtainable with one-dimensional devices. The multidimensional structures should be cheaper to construct, smaller, and lighter in weight than conventional vacuum tubes.

Note:

No additional documentation is available. Specific questions, however, may be directed to:

Technology Utilization Officer
Ames Research Center
Moffett Field, California 94035
Reference: B74-10110

Patent status:

This invention is owned by NASA, and a patent application has been filed. Inquiries concerning non-

(continued overleaf)

exclusive or exclusive license for its commercial development should be addressed to:

NASA Patent Counsel

Mail Code 200-11A

Ames Research Center

Moffett Field, California 94035

Source: John Dimeff
Ames Research Center
and William J. Kerwin of
University of Arizona
(ARC-10445)